

UHF DIGITAL TRANSCEIVER

ID-31E

SPECIFICATIONS

GENERAL		
• Frequency coverage		
Version	Transmit	Receiver
EUR	430-440MHz	
UK	430-440MHz	400-479MHz *
ITR	430-434, 435-438MHz	
Guaranteed range: * 430-440MHz		
• Type of emission	F2D, F3E, F7W	
• Mode	DV, FM, FM-N	
• Number of memory channels	1252 channels (including 500 regular channels, 700 D-STAR repeater, 50 program scan edges and 2 call)	
• Frequency resolution	5, 6.25, 10, 12.5, 15, 20, 25, 30, 50, 100, 125 and 200kHz	
• Operating temperature range	-20°C to +60°C	
• Frequency stability	±2.5ppm (-20°C to +60°C on the basis of 25°C)	
• Power supply requirement	7.4V DC (with BP-271, BP-272)	
Alkaline cells	5.5V DC (with BP-273)	
External DC power	10-16V DC	
• Current drain (at 7.4V DC)		
Tx High	Less than 2.5A	
Rx Internal SP (16Ω)	Less than 450mA/350mA (DV/FM, FM-N)	
External SP (8Ω)	Less than 300mA/200mA (DV/FM, FM-N)	
• Antenna impedance	50Ω (SMA)	
• Dimensions (W×H×D, projections not included)	58×95×25.4 mm	
• Weight (approx.)	140g (without battery), 225g (with BP-271 & antenna)	
TRANSMITTER		
• Modulation system DV, FM, FM-N	GMSK reactance modulation, FM reactance modulation	
• Output power (at 7.4V DC)	5W, 2.5W, 0.5W, 0.1W (High, Mid, Low, S-low)	
• Spurious emissions	Less than -60dBc (High, Mid), Less than -13dBm (Low, S-low)	
• Max. frequency deviation	±5.0/2.5kHz (FM/FM-N)	
• Ext. Mic impedance	2.2kΩ	
RECEIVER		
• Sensitivity DV, FM, FM-N	Less than 0.28μV (at 1% BER) Less than 0.18μV (at 12dB SINAD)	
• Selectivity DV FM FM-N	More than 50dB More than 55dB More than 50dB	
• Spurious rejection	More than 60dB	
• Audio output power	(at 7.4V DC, 10% distortion)	
Internal SP (16Ω load)	More than 400mW	
External SP (8Ω load)	More than 200mW	
• Supplied accessories (*Depending on version)		
• Battery pack, BP-271 • Wall charger, BC-167SD*		
• Antenna, FA-S270C • Belt clip, MB-127		
• Hand strap • Cloning software, CS-31		

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.

BATTERY PACKS AND CASE



Battery packs	Type	Capacity	Operating time* (Approx.)
BP-271	Li-ion, 7.4V	1150mAh (min.), 1200mAh (typ.)	4.5hours (DV) 4.5hours (FM)
BP-272	Li-ion, 7.4V	1880mAh (min.), 2000mAh (typ.)	7.5hours (DV), 8hours (FM)
BP-273	LR6 (AA) batteriesx3		-

* Tx: Rx: standby = 1:1.8. Power save function ON. GPS OFF.

WALL CHARGER



BC-167SD

RAPID CHARGER



BC-202
Charges BP-271/BP-272 in 2/3.5 hours.

BC-123SE

DC POWER CABLE



OPC-254L/LR

CIGARETTE LIGHTER CABLES



CP-19R

CP-12L

SPEAKER-MICROPHONES



HM-75LS HM-186LS

EARPHONE-MICROPHONES



HM-153LS HM-166LS

SLIM L-TYPE PLUG ADAPTER CABLE



OPC-2144

HEADSETS and PLUG ADAPTER CABLE



HS-94 Earhook type HS-95 Behind-the-head type HS-97 Throat type

OPC-2006LS
Required when using any of these headsets

DATA CABLE



OPC-2218LU
USB type

CI-V LEVEL CONVERTER



CT-17

CARRYING CASE



LC-178

BELT CLIP



MB-127

FA-S270C UHF ANTENNA
Same as supplied.

AD-92SMA ANTENNA ADAPTER
SMA-BNC antenna adapter.

SP-13 EARPHONE
OPC-2144 is required.

CS-31 CLONING SOFTWARE
Same as supplied.

All stated specifications are subject to change without notice or obligation.

D-STAR (Digital Smart Technology for Amateur Radio) is a digital radio protocol developed by JARL (Japan Amateur Radio League). Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia, Japan and/or other countries. All other trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 www.icom.co.jp/world Count on us!

Icom America Inc.
2380 116th Avenue NE,
Bellevue, WA 98004, U.S.A.
Phone : +1 (425) 454-8155
Fax : +1 (425) 454-1509
E-mail : sales@icomamerica.com
URL : <http://www.icomamerica.com>

Icom Canada
Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone : +1 (604) 952-4266
Fax : +1 (604) 952-0090
E-mail : info@icomcanada.com
URL : <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.
Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone : +61 (03) 9549 7500
Fax : +61 (03) 9549 7505
E-mail : sales@icom.net.au
URL : <http://www.icom.net.au>

Icom New Zealand
146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone : +64 (09) 274 4062
Fax : +64 (09) 274 4708
E-mail : inquiries@icom.co.nz
URL : <http://www.icom.co.nz>

Icom (Europe) GmbH
Communication Equipment
Auf der Krutzwiese 24
65812 Bad Soden am Taunus, Germany
Phone : +49 (6196) 76685-0
Fax : +49 (6196) 76685-50
E-mail : info@icomeurope.com
URL : <http://www.icomeurope.com>

Icom Spain S.L.
Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone : +34 (93) 590 26 70
Fax : +34 (93) 589 04 46
E-mail : icom@icomspain.com
URL : <http://www.icomspain.com>

Icom (UK) Ltd.
Blacksole House, Altra Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone : +44 (01227) 741741
Fax : +44 (01227) 741742
E-mail : info@icomuk.co.uk
URL : <http://www.icomuk.co.uk>

Asia Icom Inc.
6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone : +886 (02) 2559 1899
Fax : +886 (02) 2559 1874
E-mail : sales@asia-icom.com
URL : <http://www.asia-icom.com>

Icom France s.a.s.
Zac de la Plaine,
1 Rue Brindejone des Moulinais, BP 45804,
31505 Toulouse Cedex 5, France
Phone : +33 (5) 61 36 03 03
Fax : +33 (5) 61 36 03 00
E-mail : icom@icom-france.com
URL : <http://www.icom-france.com>

Icom Polska
81-850 Sopot, ul. 3 Maja 54, Poland
Phone : +48 (58) 550 7135
Fax : +48 (58) 551 0484
E-mail : icompolska@icompolska.com.pl
URL : <http://www.icompolska.com.pl>

ICOM

UHF DIGITAL TRANSCEIVER

ID-31E

Further Pushing Evolutionary Boundaries!

Compact
& Lightweight

IPX7
Submersible

GPS
Receiver



DIGITAL

Compact & Lightweight



IPX7 Waterproof



GPS Receiver



A New Generation of Multi-Function, Easy-to-Use Digital Transceiver

Lightweight & Compact Body

The ID-31E has a compact 58x95x25.4 mm body, and weighs only 225g (approx.) with battery pack and antenna. It's easy for carrying around all the time anywhere.


IPX7 Waterproof Construction

The ID-31E provides superior waterproof protection equivalent to IPX7 (1m depth of water for 30 minutes). Ideal for use in harsh outdoor environments.



Built-in GPS Receiver

The built-in GPS receiver shows your current position and altitude on the display and offers a position reporting function in DV mode. The GPS log function logs your position information at regular intervals (1 second–60 seconds, depending on the setting) and memorizes this in the microSD card to export to your PC. In addition, the GPS-A mode assists in easy D-PRS mode operation.

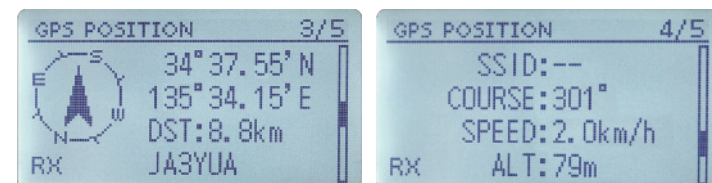

RX (Received station) position information example

D-STAR DV (Digital Voice) Mode

The D-STAR (Digital Smart Technology for Amateur Radio) DV mode has lots of advantages over the analog FM mode: digitally modulated clear voice, 950 bps (approx.) data individual calling using a call sign and access to the world wide repeater network linked with the Internet.

Automatic Repeater List-up Function

The ID-31E will be shipped with D-STAR repeater memories pre-programmed*. Using the GPS position information, the automatic repeater list-up function shows the list of nearby D-STAR repeaters from the memory.

* To use the automatic repeater list-up function, the position data of the repeater is required. The position data of some D-STAR repeaters may not be available.




Near Repeater Function

Repeater Detail

microSD Card Slot

When used with a microSD card (up to 32GB), various contents including voice memories, GPS log, memory channels, D-STAR repeater memories and other personal settings can be stored on the microSD card and can be transferred to a PC. The voice memory function records incoming and outgoing calls in "WAV" format and allows you to play them on the radio or on a PC.



Other Digital Features

- Automatic speech function announces the received call sign
- Digital code squelch
- Digital call sign squelch
- One touch reply function
- DR (D-STAR Repeater) mode
- Automatic reply function

Full Dot-matrix Display & Directional Keypad

The directional keypad and quick menu button help you with quick and intuitive access to many settings and speeds up the operation. The large full dot-matrix display with easy-to-read characters offers better visibility. The LCD and keypad backlighting is handy for night time operation.



Directional keypad

Easy-to-see menu icons

5W Output Power

Using a highly-efficient PA amplifier, the ID-31E generates 5W of RF output power from this compact body. The supplied BP-271 provides up to 4.5 hours* of operating time, and the optional large capacity battery pack, BP-272 provides up to 7.5 hours* of operating time.

* Typical operation with 1:1.8 duty cycle in DV mode. (Power save ON, GPS OFF)

External DC Power Jack

An external DC power jack allows for operation with an external DC power supply (10–16V DC*). When used with the CP-19R, CP-12L or OPC-254L/LR, simultaneous operation during charging is possible.

* When more than 14V volts is applied, the output power is reduced to Mid level (2.5W)

CS-31 Cloning Software Supplied

The CS-31 cloning software* is supplied with the ID-31E (supplied with the application CD). Used with this software, various settings including the memory channels, D-STAR repeater memories and other settings can be made from a PC. The latest version of the CS-31 will be available from the Icom web site.

* Either optional OPC-2218LU USB cloning cable or a microSD card is required for transferring the data.

Total 1,252 Memory Channels

The ID-31E has a total 1,252 memory channels, including 500 regular channels, 700 D-STAR repeater (DR) memories, 50 scan edges and 2 call channels with 26 memory banks. All memory channels, program scan edges and memory banks can be named with 16-character channel comments.

Multiple Scan Functions

The ID-31E supports various scan types for maximum reception and ease of use.

- Full scan • Programmed scan • Duplex scan • Memory scan
- Mode memory scan • All bank scan • Selected bank scan
- Tone scan • Bank link scan (DMS) • Program scan link
- Skip scan

Other Features

- Analog FM mode (Wide/Narrow)
- Built-in CTCSS/DTCS encoder and decoder (for analog FM)
- 16 DTMF memory channels (24 digits)
- Squelch release function to monitor a weak signal
- Optional CT-17, CI-V level converter for remote radio control
- Auto power save
- Auto power off
- Clock function
- Priority watch
- Key lock function



UHF DIGITAL TRANSCEIVER **5W**
ID-31E